


Extruder dry EXD



Features:

- Possible screw sizes Ø200, Ø250 and Ø350
- Hopper easy to clean by hinge door
- Analog level sensor with 6 different settings for process optimisation
- 2 mixing paddles interpedently driven by frequency converter
- Stainless steel screw treated with wet abrasive blasting
- Optimized extrusion mouthpiece with safety switch
- Cooling chamber in extrusion mouthpiece
- Electro polished extrusion plate with Ø0.5 holes
- Electronics mounted in a separate stainless steel cabinet
- 9'' full colour touch-screen in stainless steel enclosure nearby extruder or integrated in line controls
- Two-hand safety control to rotate the screw and mixer at low speed during cleaning
- All construction parts are stainless steel AISI 304

Technical data:

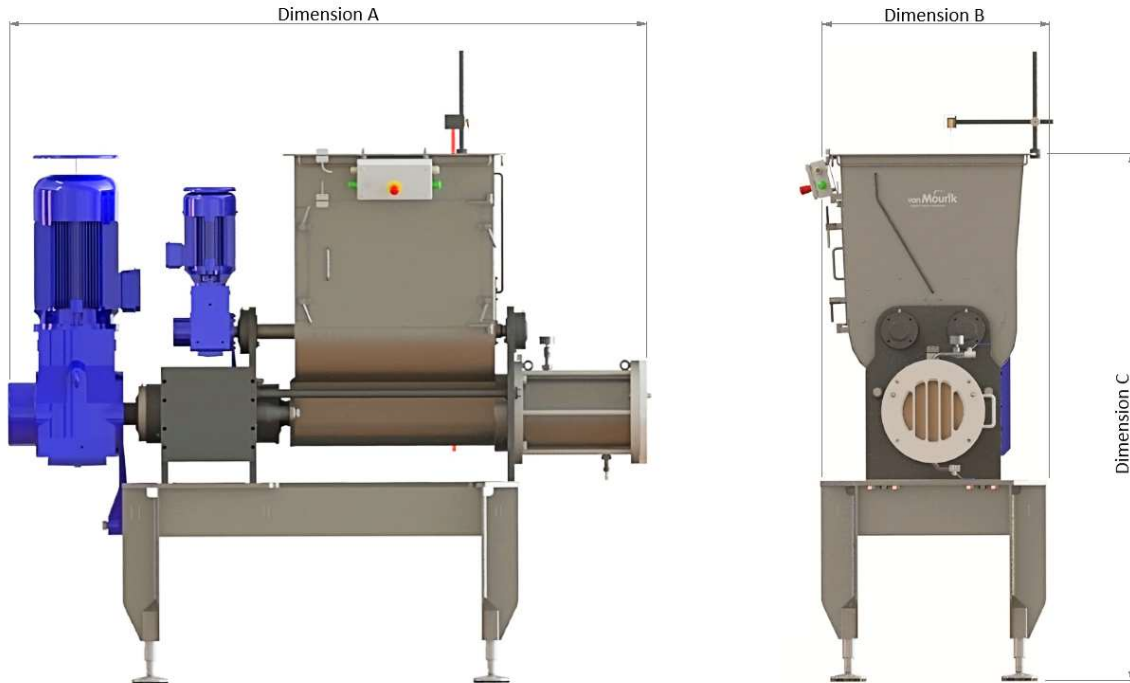

	EXD-200	EXD-250	EXD-350
Weight	1500 kg	2000 kg	2200 kg
Dimension A	2220 mm	2580 mm	2580 mm
Dimension B	820 mm	920 mm	920 mm
Dimension C	2030 mm	2200 mm	2200 mm
Volume hopper	250 litre	450 litre	450 litre

- Electrical connection: 3 phase 400VAC + N + Pe

Advantages:

- Hygienic design
- Low maintenance design
- Optimised inner geometry for mouthpiece
- Product contact surfaces treated with water jet blasting, which enables effective cleaning and improves corrosion resistance
- Open frame design for the prevention of dead spaces

Optional:

- Door position left or right
- Cleaning spray ball
- Curved extrusion mouthpiece for more extrusion surface